

PRESIDENT LOW FLOOR SERIES

STARTRANS

BUSES BY SUPREME



THE STARTRANS PRESID



PRESIDENT LF - 10" ENTRY STEP HEIGHT - STYLISH GOOD LOOKS

Startrans new President Low Floor offering is the next step in ground transportation. This new medium duty bus provides excellent passenger visibility, a spacious aisle, stylish good looks, and the built-in durability expected from a Startrans Bus.



All the features you want and need.

With its inner-city style passenger windows, built-in wheelchair ramp with a 10" entry step height, an optional kneeling feature, and wide entrance doors, this new product is the next step in dedicated route vehicles.

The interior of the President Low Floor features wide interior aisles, spacious luggage racks, variable seating options up to 27 passengers, and a wheelchair ramp with a wide

range of securement systems.



Tough, solid value.

The new Workhorse chassis provides the working platform for this new and innovative vehicle. This chassis is available in three wheelbases with a GVWR of 19,000 pounds. With its innovative front wheel

drive system, GM Duramax 6.6 diesel power plant, and Allison transmission, you are assured of years of reliable performance.

Built-in quality.

As with all Startrans products, this vehicle is backed by Supreme Corporation's reputation for quality and service. For a vehicle that will look great and perform dependably for years, the new Startrans President Low Floor is the solution to your transportation needs.



PRESIDENT LOW FLOOR FEATURES

STARTRANS STANDARDS

- 3/4" thick marine tech plywood
- Steel cage (1.5" x 1.5" x 14 gauge steel)
- Astro-foil insulation—"R 16" value in ceiling, "R 8.2" value in walls
- Exterior covered with 4 mm "Alucobond"
- Steel roof constructed of 1" x .5" x 14 gauge steel
- Electric double-out entry door "Vapor" electric door header
- Rear rubber energy absorbing impact bumper with a steel anti-ride
- Exterior mirrors – heated and remote
Flat mirror – 8.5" x 12", convex mirror is 5.5" x 4"
- All wiring added will meet one of the following standards:
 - SAE Specification J1128-SXL high temperature

- SAE Specification J1128-GXL high temperature
- SAE Specification J1128-SGX high temperature
- Wiring color-coded, number and function designated every 12"
- User-friendly left hand control console
- Passenger seating secured in 1 5/8" wide Unistrut channel seat track
Floor track meets FMVSS 206
- Passenger side windows: 36" high x 50" wide (Total square inches of viewing area is 1800)
- Drive air conditioning system rated at 42,000 BTU (optional)
- General warranty – 12 months/12,000 miles
- Body warranty – 5 year/75,000 miles

- Exterior height – 120" (10') includes roof-mounted condenser
- Interior ceiling height – 88.5"
- Overall length – 317.5" / 331.5" / 363.5"
- Turning radius – 302", 319", 357"
- Ground to floor @ ride height – 9"
- Ground to floor kneeling – 7"
- Ground to floor raised:
 - Front - 10.5"
 - Rear – 11"
- Entry door clear opening – 38" x 82"
- Departure angle – 10 degrees
- Approach angle – 24 degrees
- Break over angle – 5.5 degrees
5.0 degrees
4.3 degrees

PRESIDENT LF DIMENSIONS

- Exterior width – 101.75"
- Interior width – 98.8"

WORKHORSE LF72 LOW FLOOR SPECIFICATIONS

GROSS VEHICLE WEIGHT RATING

19,000 lbs.

FRONT AXLE RATIO

Carraro axle 6.10-driven, ratio 5.13

WHEEL BASE SELECTIONS (IN.)

180 194 226

BRAKES

Hydraulic disc front and rear

ENGINE

Duramax 6.6 liter
Peak HP: 210 @ 2750 rpm
Peak torque: 520 lb.-ft. @ 1600 rpm

TRANSMISSION

Allison 1000 Series
Drop box, custom design-14.6" drop (ratio 1:1)

ELECTRICAL

Alternator Dual: 145 amps:290 amps

FUEL SYSTEM


Tank, 50 gallons

STEERING

Tilt steering column & cruise control


Due to Supreme Corporation's commitment to product quality, specifications and options are subject to change in the interest of product improvement.

President LF 30'

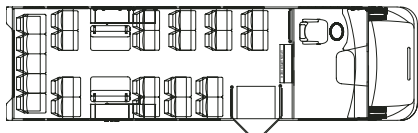


27 Passenger

President LF 27.5'

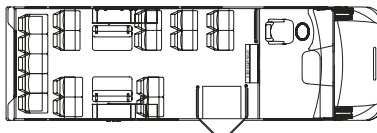


21 Passenger


President LF 26'

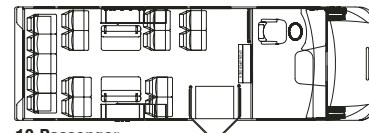


19 Passenger

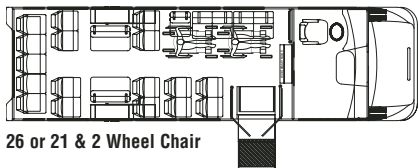


26 or 21 & 2 Wheel Chair

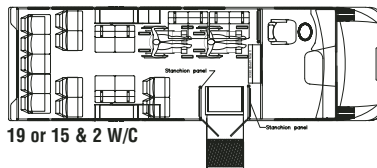


19 or 15 & 2 W/C

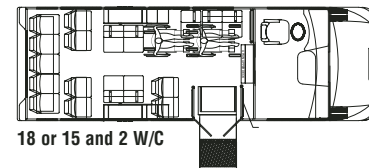


18 or 15 and 2 W/C

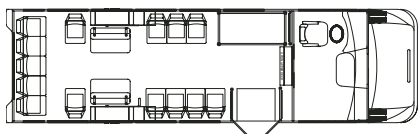

18 Passenger

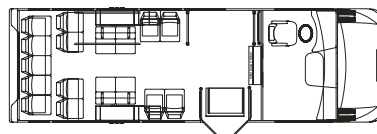

17 Passenger

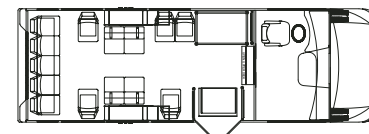

14 Passenger



2592 Kercher Road • P.O. Box 463 • Goshen, IN 46528
574-642-4730 • 877-258-1391 • FAX 574-642-4108
www.StarTransBus.com